


Submersible Agitator

TRJ

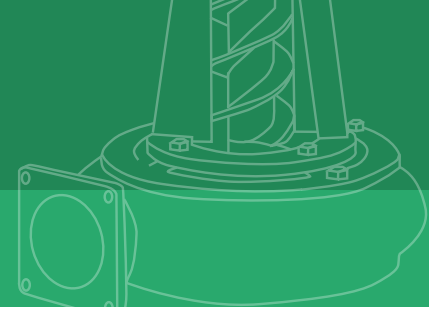

Area of Application

JOHSTADT Submersible Agitators TRJ are used for the highly effective mixing of flowable media and manure. The propeller design creates an optimal liquid jet with high mixing performance and efficiency. The Submersible Agitators are particularly environmental, silent and economical and reach an excellent agitation up to a complete homogenisation of the agitated media. Also floating and thinking layers are dissolved.

Performance

Nominal speed: 1450 min⁻¹
Agitator blade speed: 280 min⁻¹
Nominal power: 11...20 kW

Technical Details

Rotation: clockwise
Immersion depth: 1...10 m
Drive: electrical diving drive with temperature sensor and leakage sensor
Agitator blade diameter: 630...780 mm

Accessory

Lowering device
Control device
Level control

